

Track Kit

TR4C-S25925

INSTALLATION SHEET

START FROM HERE

- Make sure **POWER** is **COMPLETELY OFF** at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all times during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application
- 120V input
- For use with 48V DC Class 2 LED drivers only (see available canopy/driver options) (included in this kit)

1. Remove fixture parts from packaging

2. TR4C-S25925 track kit includes the following:

- TR989603 (**3a**) x 1
- TRC989910 (**6d**) x 2
- TRS25925 (**5a**) x 4
- TRT989200 (**2a**) x 1

3. Remove canopy cover (**3a**) from packaging

4. Separate mounting plate (**1c**) from canopy cover (**3a**) by removing screws (**3b**). Attach mounting plate (**1c**) to electrical junction box (**1a**) using junction box screws provided (**1d**) in hardware package

5. Make proper electrical connections (**black** to **hot "L"**, **white** to **neutral "N"**, **green** to **"GND"**) with wire nuts (**1b**) provided in hardware package




6. Mount track (**2a**) in desired location with a minimum of 1.5" of track overlapping the electrical junction box (**1a**) (See **Illustration 1**)

7. Remove perforated piece (See **Illustration 3**)

8. Secure track (**2a**) to mounting surface with screws (**2b**) and anchors (**2c**). Attach end connector (**6d**) to track (**2a**) and secure to ceiling with screw (**6c**) and anchor (**6a**) (See **Illustration 2**).

9. Attach canopy cover (**3a**) to desired location on track (**2a**) and secure to mounting plate (**1c**) with screws (**3b**)

10. Attach fixture (**5a**) to track (**2a**), followed by track covers. Cut track covers to desired length

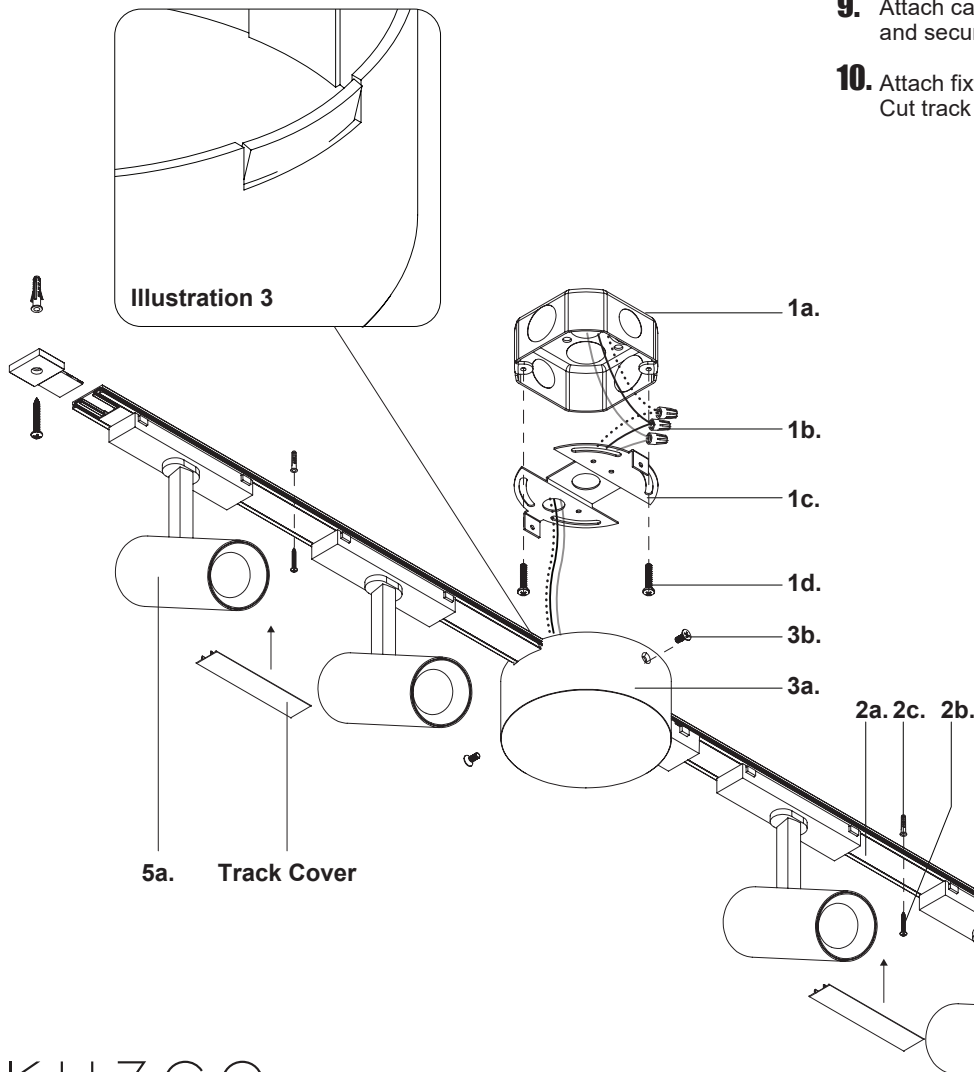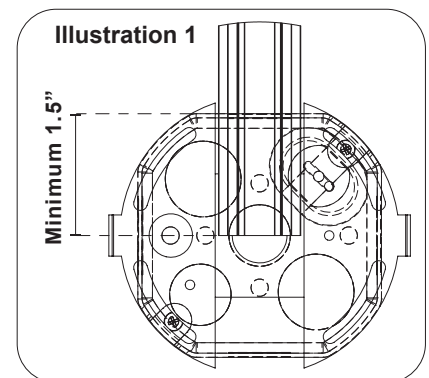

KUZCO

19054 28th Avenue Surrey, BC Canada V3Z 6M3
T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196
W: kuzcolighting.com
20260728